






COMPLETE SYSTEMS FOR CNC MACHINES

A COMPLETE DETECTION & SUPPRESSION SYSTEM PRE-ENGINEERED FOR CNC MACHINES

- Easy / Flexible installation
- Quick & Effective suppression
- Highly Dependable: no electricity or moving parts

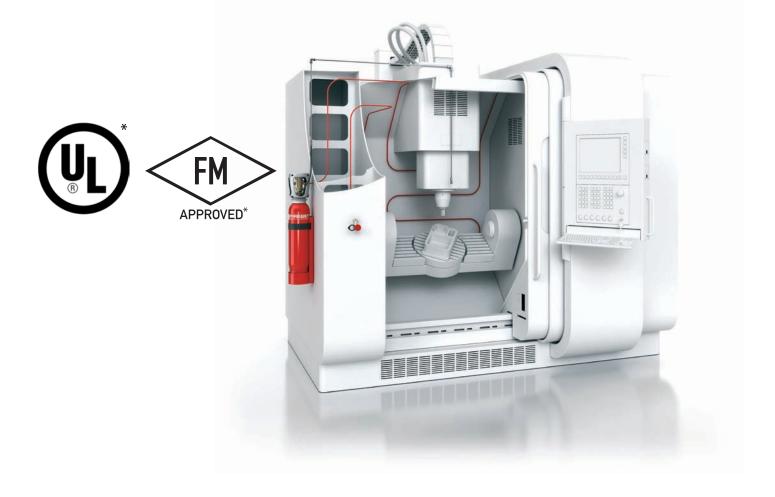

EVERYTHING YOU NEED TOGETHER IN ONE BOX



REDUCES EVEN THE MOST CRITICAL CNC MACHINES FIRE RISKS:

- Combustion of oil residues or machined metals due to coolant system malfunction, tool breakage or improper maintenance.
- Extensive machine repair
- Late orders due to downtime
- Extensive cleanup if sprinkler system actuates


 ${}^*\mathsf{UL}$ and FM certifications apply only to indirect DOT clean agent systems





THE FIREDETEC® DIFFERENCE

Rotarex FireDETEC® systems use a proprietary continuous linear sensor tube that reliably detects and actuates release of the extinguishing agent using pneumatic technology. It is more flexible, space efficient and cost effective versus alternative mechanical or electronic systems.

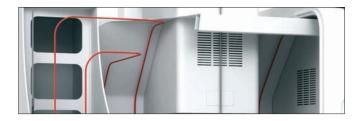

1. Quick & Easy installation directly inside CNC machines:

The flexible sensor tubing is easily installed directly on the walls and roof of the machining enclosure.

When in service, the tubing is pressurized with dry nitrogen to 16 bar. The dynamics of pressurization make the tubing more reactive to heat.

2. Early fire detection:

If a flame-up occurs, the heat of the fire causes the pressurized sensor tube to burst at the hottest spot (approx. 110°C)

3. Instant suppression:

The sudden tube depressurization actuates the special pressure differential valve and instantly floods the entire cabinet area with CO₂ extinguishing agent. The fire is quickly suppressed just moments after it began... minimizing damage and downtime.



CHOOSE FROM 3 SUPPRESSION AGENTS: A MATTER OF PREFERENCE







	CO₂	CHEMOURS FM-200® AGENT	FK-5-1-12 fluid
Performance	Excellent	Excellent	Excellent
Advantages	No residue Non-reactive Economical All Natural Prevents re-ignition Medium Pressure (60 bar)	No residue - safe for electronics Non-reactive / Non-corrosive Most globally-proven clean agent Good Environmental profile Safe to use in occupied areas Compact Cylinder Low pressure (16 bar)	No residue - safe for electronics Non-reactive / Non-corrosive Increasing popularity Good Environmental profile Safe to use in occupied areas Compact Cylinder Low pressure (16 bar)

*UL and FM certifications apply only to indirect DOT clean agent systems









WE'RE WORLDWIDE

Brasil * China * France * Germany * Hungary * India
Indonesia * Italy * Japan * Luxembourg * Malaysia * Middle East
Mexico * Philippines * Poland * Singapore * South Africa
South Korea * Spain * Sweden * Thailand * Taiwan
United Kingdom * USA * Vietnam

Find out our locations here rotarexfiretec.com/locations











B04020_BR0_EN_A4_V06